

# IRM-8601M2-x series

#### Features

- · High protection ability against EMI
- · Ellipsoid lens for improved reception characteristics
- · Available for various carrier frequencies
- Min burst length: 10 cycles
- Min gap length: 14 cycles
- · Low operating voltage and low power consumption
- · High immunity against ambient light
- High immunity against TFT backlight
- Long reception range
- High sensitivity
- · Pb free and RoHS compliant

#### Description


The IRM-8601M2-x devices are DIP type infrared receivers which have been developed and designed by using the latest IC technology.

The PIN diode and preamplifier are assembled onto a lead frame and molded into a black epoxy package which operates as an IR filter. The demodulated output signal can directly be decoded by a microprocessor.

## Applications

- AV equipment such as TV, VCR, DVD, CD, MD, etc.
- CATV set top boxes
- Multi-media Equipment
- Other devices using IR remote control

### **Application Circuit**



The RC Filter must be connected as close as possible to Vcc and GND pins.




1 2 3

#### Pin Configuration

- 1. OUT
- 2. GND
- $3. V_{CC}$

#### **Block Diagram**








## IRM-8601M2-x series

#### **Parts Table**

Model No.	Carrier Frequency	
IRM-8601M2-2	36 kHz	
IRM-8601M2	38 kHz	
IRM-8601M2-4	40 kHz	

## **Package Dimensions**

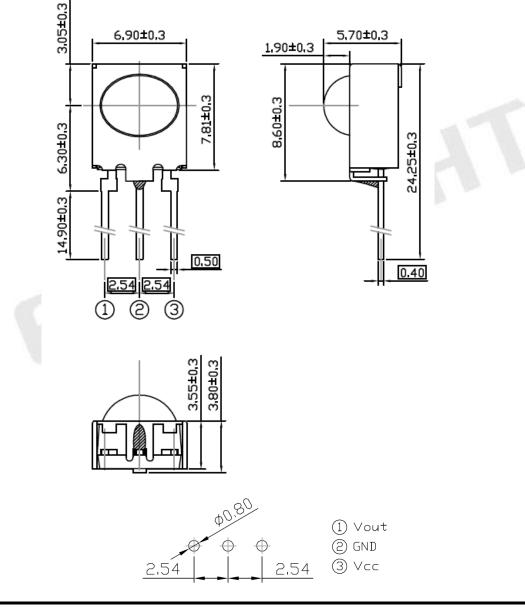

(Dimensions in mm)

Everlight Electronics Co., Ltd. Document No: DMO-0000183 Revision :1

LifecyclePhase:正式發行

http://www.everlight.com June 25, 2010 Release Date:2010-07-20 22:26:22.0

**Expired Period: Forever** 



## Absolute Maximum Ratings (T<sub>a</sub>=25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	6	V
Operating Temperature	Topr	-20 ~ +80	
Storage Temperature	Tstg	-40 ~ +85	
Soldering Temperature <sup>*1</sup>	Tsol	260	

<sup>\*1</sup> 4mm from mold body for less than 10 seconds

## Electro-Optical Characteristics (Ta=25 , Vcc=3V)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition	
Current consumption	Icc		0.4	0.6	mA	No input signal	
Supply voltage	V <sub>cc</sub>	2.7	- 7	5.5	V		
Peak wavelength	λ <sub>p</sub>		940		nm		
Reception range	L <sub>0</sub>	14		-	- m		
	L <sub>45</sub>	6	-		111	See chapter ,Test method'	
Half angle(horizontal)	φ <sub>h</sub>		±35		deg		
Half angle(vertical)	φν		±25		deg		
High level pulse width	Т <sub>н</sub>	450		700	μs	Test signal	
Low level pulse width	TL	500		750	μs	according to figure 1	
High level output voltage	V <sub>OH</sub>	Vcc-0.4			V		
Low level output voltage	V <sub>OL</sub>		0.2	0.5	V	I <sub>SINK</sub> 2mA	
Internal pull up resistor	R <sub>PU</sub>	85	100	115	kΩ		

Everlight Electronics Co., Ltd. Document No: DMO-0000183 Revision :1



### Test method

The specified electro-optical characteristics are valid under the following conditions.


- 1. Measurement environment
- A place without extreme light reflections.
- 2. External light

The environment contains an ordinary, white fluorescent lamp without high frequency modulation. The color temperature is 2856K and the illumination at the IR receiver is less than 10 Lux (Ev 10Lux).

3. Standard transmitter


The test transmitter is calibrated by using the circuit shown in figure 2. The radiation intensity of the transmitter is adjusted until **Vo=400mVp-p.** Both, the test transmitter and the photo diode, have a peak wavelength of 940nm. The photo diode for calibration is PD438B ( $\lambda$ p=940nm, Vr=5V).

4. The measurement system is shown in Fig.-3

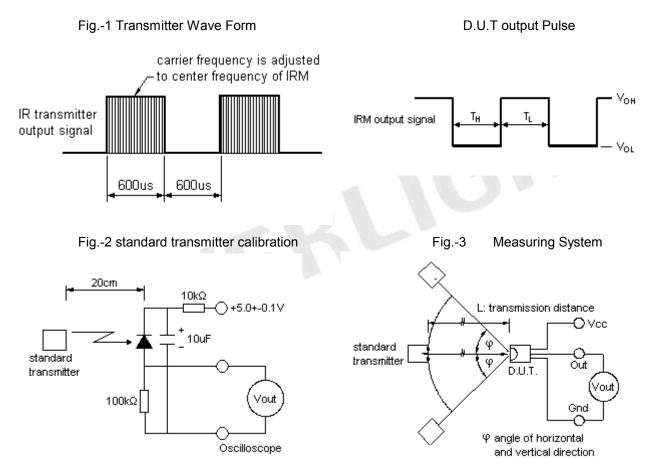

Everlight Electronics Co., Ltd. Document No: DMO-0000183 Revision : 1



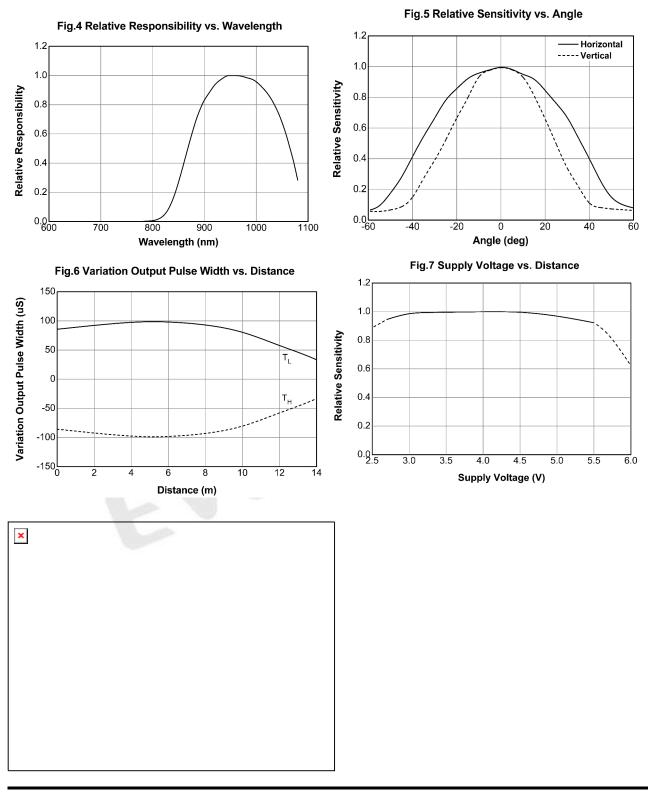

## **Typical Electro-Optical Characteristic Curves**


Everlight Electronics Co., Ltd. Document No: DMO-0000183 Revision :1

LifecyclePhase:正式發行



### **Code information**

Protocol	Suitable	Protocol	Suitable
JVC	Yes	RCA	No
Matsushita	Yes	Sharp	Yes
Mitsubishi	Yes	Sony 12 Bit	Yes
NEC	Yes	Sony 15 Bit	Yes
RC5	Yes	Sony 20Bit	Yes
RC6	Yes	Toshiba	Yes
RCMM	No	Zenith	Yes
RCS-80	No	Continuous Code	Yes



1500 pcs / Box 10 Boxes / Carton



#### DISCLAIMER

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without the specific consent of EVERLIGHT.

